
How to Create a Safety Hazard (Document)


Note: "Safety hazards" require setting company-level permissions first and will not be displayed without permission.

There are two ways to enter the interface for creating safety hazards:

1. SMS Management → Inspections interface:

After logging in to the OLISS Web side, users should click "SMS Management → Inspections" in sequence to enter the inspection record interface by default, then click "Safety Hidden" to switch to the safety hazard interface. On this interface, click "Create Safety Hazard", select the inspection object (specific vessel/shore base), then click "Confirm" to enter the create safety hazard interface. Fill in the report name, select the date, and type, and add details of safety hazard (which can be added by clicking "Add /Select From Item Datebase /Import"), fill in information such as department, authority, and whether to upload attachments as needed, and then click "Submit".

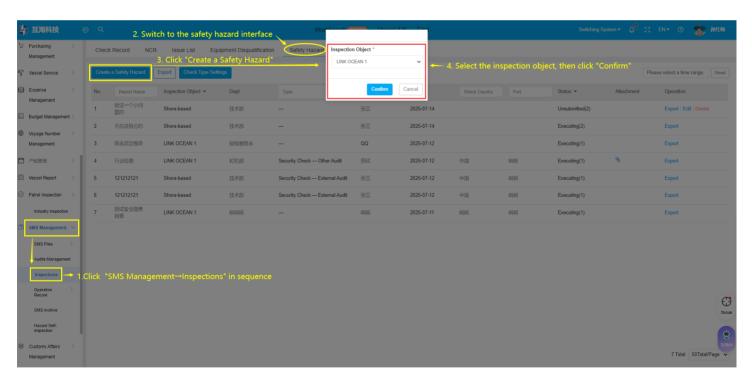

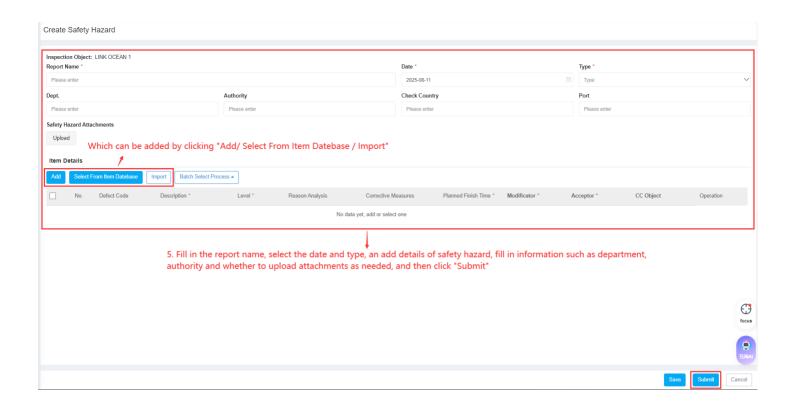

2. Patrol Inspection → Industry Inspection Interface:

After logging in to the OLISS Web side, users should click "Patrol Inspection → Industry Inspection" in sequence. On the default industry inspection interface, in the "Operation" column on the right, click "Create a Safety Hazard" in the "Arrange Rectification" drop-down menu to enter the Create Safety Hazard interface. On this interface, fill in the report name, select the date and type, and also fill in information such as department and inspection agency. Upload safety hazard attachments and add safety hazard details as needed (you can add safety hazard details by "Select from item datebase" or "Import"). Finally, click "Submit".

